



SNOW PLOW CUTTING EDGE



TUNDRA
T A M E R

www.TundraTamer.com

LIB-TT-SPB-03-01

Snow Plow Cutting Edge

Thank you for purchasing the Tundra Tamer snow plow cutting edge. This polyurethane cutting edge will protect your manhole covers, valve boxes, curbs, markings, reflectors and cobblestones. The polyurethane blade will absorb the shock produced by impact and will not crack the cast iron and concrete structures.

We hope you will find these instructions easy to follow and have no problem installing your cutting edge, but if you run into trouble, please don't hesitate to call us at 906-226-9747.

WARNING

Always obey all applicable safety rules.

**Be sure the vehicle is not running and wheel chocks have been applied.
If possible, remove the plow from the vehicle before installing.**



CONTENTS UNDER TENSION

The cutting edge is tightly rolled under extreme tension. Be sure to open it in an area away from people, pets, or breakable objects. We recommend opening it in your driveway or yard.

Installation Tools Required (Not Included)


- Knife or scissors
- Permanent marker
- Longer bolts and nuts

- Drill with bit large enough to accommodate your bolts
- Wrench or tools to remove/replace cutting edge



In the Box

- Polyurethane cutting edge

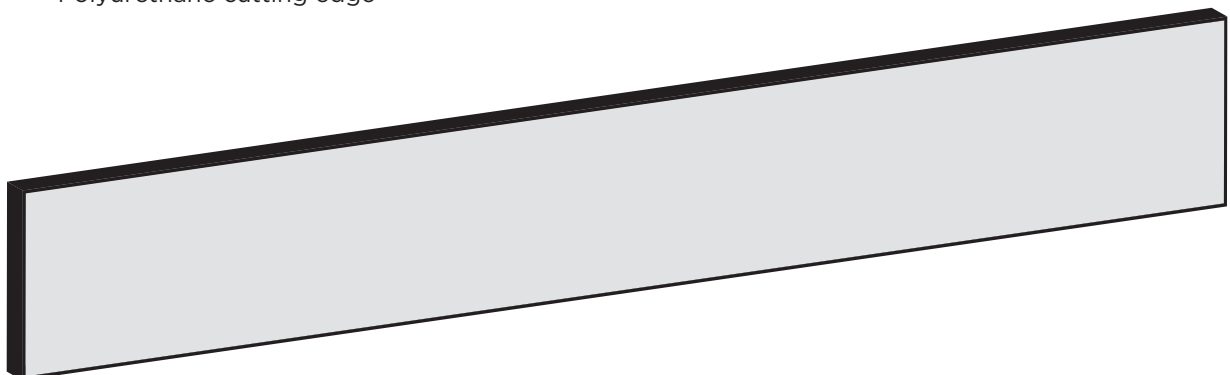

Before installing your Tundra Tamer cutting edge, please read the install guide completely.



Step One:

Using a knife or scissors, cut the tape on the cutting edge. Make sure to do this in an open area free of people, pets, and breakable objects.

When the tape is cut, the cutting edge will open very quickly, so be sure to stay out of the way to avoid injury.



Step Two:

Remove the metal cutting edge from your plow and use that as a guide or template. Lay the steel and polyurethane cutting edges on your work surface. Place the steel cutting edge on top of the polyurethane blade, centering it as well as possible.



Step Three:

Mark the holes from the steel cutting edge onto the polyurethane blade with a permanent marker.

Installation



Step Four:

Use a drill with a bit of the proper diameter for your mounting hardware, and plunge the bit at medium speed to cut the holes.



Step Five:

Mount the cutting edge onto your plow. Some customers like to install the old metal blade over the top of the polyurethane blade. If you choose to install in this manner, make sure to take that into account when determining what lengths of bolts you'll need.



Your Tundra Tamer snow plow cutting edge is now installed.

When plowing, the polyurethane cutting edge should not have a significant amount of down pressure against the ground. It should “ride” along the surface, clearing the snow and ice.

Don't forget that you can flip the poly blade over once it's worn, to double the life.



ARGONICS
ENGINEERED POLYURETHANE

520 9th Street • Gwinn, MI 49841
906.226.9747 f: 906.226.9779
www.argonics.com

The Argonics Nested Triangle logo, and Tundra Tamer™ are trademarks or registered trademarks of Argonics, Inc. ©2021